

## Pink Antistatic Bags CP13 Series

### Description:

Antistatic polyethylene is designed for applications requiring amine-free, static-protective packaging. This film can be printed with no smearing or flaking.


- Will not corrode polycarbonate surfaces
- Superior performance in low relative humidity
- Surface resistivity less than  $1 \times 10^{12}$  ohms/sq
- 4 & 6 Mil meet full static decay requirements of MIL-PRF-81705D, Type II and EIA 541

### Characteristics

### Results

### Test Method

Tensile Strength	2,800 psi MD 2,500 psi TD	ASTM D-882
Tear Strength	111 gms/Mil MD 118 gms/Mil TD	ASTM D-1922
Burst Strength (Mullen)	26 psi	FTMS 191, Method 5122
Seal Strength	1,000 psi	ASTM D-882
Elongation at break	500% MD 700% TD	ASTM D-882
Dart Impact	> 300 gms	ASTM D-1709
Polycarbonate Haze	No effect	72 hour contact
Corrosivity Observations	No effect	FTMS 101C, Method 3005
Surface Resistivity	$< 10^{12}$	ESD Association Test Standard ESD STM11.11-2001 & MIL STD 3010
Static Decay Rate	< 2 seconds	FTMS 101C, Method 4046.1

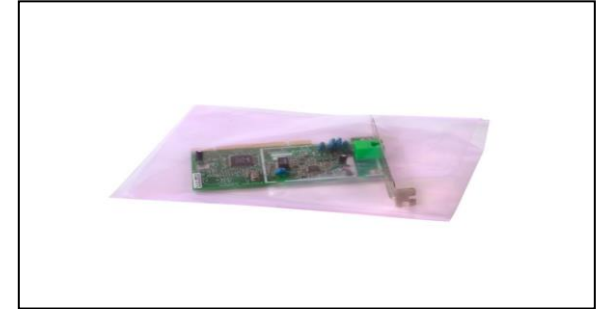

- \* Available in 2, 4 and 6 Mil
- \* Custom sizes available upon request
- \* Specifications apply to all products such as ziplock bags, form fit bags, tubing and sheeting.

### Related Products:



This document is prepared for our customers as a service and is to the best of our knowledge true & accurate. However, it is understood & agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.